



CLOUD VIDEO SURVEILLANCE

# Eagle Eye Cloud VMS Product Catalog



## TABLE OF CONTENTS

<b>HARDWARE</b>	<b>3</b>
Eagle Eye Bridges	3
Eagle Eye CMVRs	6
Eagle Eye Switches	11
Eagle Eye Cabinet Systems	13

## COMPANY OVERVIEW

# Smart, Simple, Cloud Video Surveillance for Your Business

Your security system should not only protect your people and property, it should also provide insight to help your business grow and thrive. It's Eagle Eye Networks mission to help you do just that.

We're leaders in delivering the power, flexibility, and cost-savings of cloud technology to the video surveillance market, helping you improve operations and enhance customer service, all while keeping an eye on what truly matters.





Whether you run a small business, global enterprise, or something in-between, you need a video solution capable of adapting to your needs – today and tomorrow. The Eagle Eye Cloud Video Management System (VMS) simplifies video surveillance through the flexibility of cloud paired with the convenience of easy, affordable installation and remote management.

# Eagle Eye Bridges

An Eagle Eye Bridge is an on-premise device used by the Eagle Eye Cloud VMS to connect cameras to Eagle Eye cloud data centers. Offered in various configurations, the bridges enable you to receive and analyze video from your cameras. In addition, they provide on-premise buffering for bandwidth management and encrypted transmission to the cloud.

## Compact Bridges






These small form factor bridges are suitable for applications up to 50 cameras at 4 MP when a server rack is not available. They can be wall or shelf mounted. This family of bridges are equipped with ruggedized, all- aluminum enclosures designed to operate in a broad ambient temperature range. The Bridge 305 also includes 4 POE ports for direct camera connection.

	BRIDGE 304+	BRIDGE 305	BRIDGE 406+	BRIDGE 504+
				
<b>Max Cameras*</b>	Up to 20 IP Cameras @4MP	Up to 12 IP Cameras @4MP; 4 POE	Up to 35 IP Cameras @4MP	Up to 50 IP Cameras @4MP
<b>Max Analytic Count*</b>	5	5	15	20
<b>LPR Support*</b>	No	No	Up to 2 Cameras	Up to 4 Cameras
<b>Video Buffer</b>	2 days on premises	2 days on premises	2 days on premises	2 days on premises
<b>POE Camera Ports</b>	None	4 port, Class 3	None	None
<b>Network Ports</b>	Dual Gigabit	1 Gigabit, 4X100 Megabit	Dual Gigabit	Dual Gigabit
<b>Video Output</b>	HDMI (1), DP (1)	HDMI (1), DP (1)	HDMI (2)	HDMI (1), DP (1)
<b>Dimension</b>	180x 127 x 64 mm 7.08 x 5.00 x 2.50 in	172 x 127 x 75 mm 6.75 x 5.01 x 3.00 in	180x 127 x 64 mm 7.08 x 5.00 x 2.50 in	229 x 127 x 83 mm 9.00 x 5.00 x 3.25 in
<b>Weight</b>	1.20 kg 2.65 lbs	1.32 kg 2.90 lbs	1.25 kg 2.77 lbs	2.39 kg 5.27 lbs
<b>Maximum Power Consumption</b>	External 100-240 VAC, 20 W	External 100-240 VAC, 22 W	External 100-240 VAC, 30 W	External 100-240 VAC, 40 W
<b>Operating Temperature Range</b>	-10-50° C 14-122° F	-10-55° C 14-122° F	-10-50° C 14-122° F	-10-50° C 14-122° F
<b>Operating Humidity Range</b>	0-70%	0-70%	0-70%	0-70%
<b>Certifications</b>	FCC, UL, CE, UKCA, NOM, ACM, RoHS, CTick, BIS	FCC, UL, PSE, CE, CCC (S&E), REACH, RoHS, C-Tick	FCC, UL, CE, UKCA, NOM, ACM, RoHS, CTick	FCC, UL, CE, UKCA, NOM, ACM, RoHS, CTick
<b>Rapid Replacement Part Numbers</b>	EN-RR000-1 (Monthly) EN-RR000-12 (Yearly)	EN-RR000-1 (Monthly) EN-RR000-12 (Yearly)	EN-RR000-1 (Monthly) EN-RR000-12 (Yearly)	EN-RR504p-1 (Monthly) EN-RR504p-12 (Yearly)

\*Typical - please utilize the Eagle Eye VMS Bridge Wizard for precise capacity





## Rack Bridges

These 1U rack-based bridges are designed to fit in standard equipment rack. The rack mount bridges are offered in a range of sizes to support larger number of cameras. Versions are available with analog camera interfaces to allow direct connection of existing NTSC and PAL cameras. Versions are also available with integrated POE ports for direct connection of IP cameras.

	BRIDGE 301	BRIDGE 303	BRIDGE 310	BRIDGE 401	BRIDGE 403
					
<b>Max Cameras*</b>	Up to 20 IP Cameras @4MP	Up to 20 IP Cameras @4MP	8 Analog (NTSC/PAL) or up to 20 IP Cameras @4MP	Up to 35 IP Cameras @4MP	Up to 35 IP Cameras @4MP
<b>Max Analytic Count*</b>	5	5	5	10	10
<b>LPR Support*</b>	No	No	No	Up to 2 Cameras	No
<b>Video Buffer</b>	2 days on premises	2 days on premises	2 days on premises	2 days on premises	2 days on premises
<b>POE Camera Ports</b>	None	8 port, Class 3	None	None	8 port, Class 3
<b>Network Ports</b>	Dual Gigabit	Dual Gigabit	Dual Gigabit	Dual Gigabit	Dual Gigabit
<b>Video Output</b>	VGA (1), DVI (1)	VGA (1), DVI (1)	VGA (1), HDMI (1), DP (1)	VGA (1), HDMI (1), DP (1)	VGA (1), HDMI (1), DP (1)
<b>Dimension</b>	427 x 251 x 45 mm 16.81 x 9.88 x 1.75 in 1U	427 x 251 x 45 mm 16.81 x 9.88 x 1.75 in 1U	427 x 251 x 45 mm 16.81 x 9.88 x 1.75 in 1U	427 x 251 x 45 mm 16.81 x 9.88 x 1.75 in 1U	427 x 251 x 45 mm 16.81 x 9.88 x 1.75 in 1U
<b>Weight</b>	3.29 kg 7.25 lbs	3.76 kg 8.28 lbs	4.14 kg 9.13 lbs	3.91 kg 8.62 lbs	3.89 kg 8.58 lbs
<b>Maximum Power Consumption</b>	Internal 100-240 VAC, 65 W	Internal 100-240 VAC, 42 W	Internal 100-240 VAC, 55 W	Internal 100-240 VAC, 50 W	Internal 100-240 VAC, 60 W
<b>Operating Temperature Range</b>	0-35° C 32-95° F	0-35° C 32-95° F	0-35° C 32-95° F	0-35° C 32-95° F	0-35° C 32-95° F
<b>Operating Humidity Range</b>	0-70%	0-70%	0-70%	0-70%	0-70%
<b>Certifications</b>	FCC, UL, PSE, CE, CCC (S&E), BIS	FCC, UL, PSE, CE, CCC (S&E), BIS	FCC, UL, PSE, CE, CCC (S&E), BIS	FCC, UL, PSE, CE, CCC (S&E), BIS	FCC, UL, PSE, CE, CCC (S&E), BIS
<b>Rapid Replacement Part Numbers</b>	EN-RR000-1 (Monthly) EN-RR000-12 (Yearly)	EN-RR000-1 (Monthly) EN-RR000-12 (Yearly)	EN-RR000-1 (Monthly) EN-RR000-12 (Yearly)	EN-RR000-1 (Monthly) EN-RR000-12 (Yearly)	EN-RR000-1 (Monthly) EN-RR000-12 (Yearly)

\*Typical - please utilize the Eagle Eye VMS Bridge Wizard for precise capacity

## Rack Bridges

	BRIDGE 410	BRIDGE 501	BRIDGE 701	BRIDGE 901
				
<b>Max Cameras*</b>	16 Analog (NTSC/PAL) or up to 35 IP Cameras @4MP	Up to 50 IP Cameras @4MP	Up to 150 IP Cameras @4MP	Up to 300 IP Cameras @4MP
<b>Max Analytic Count*</b>	10	10	20	30
<b>LPR Support*</b>	No	Up to 4 Cameras	Up to 8 Cameras	Up to 8 Cameras
<b>Video Buffer</b>	2 days on premises	2 days on premises	2 days on premises	2 days on premises
<b>POE Camera Ports</b>	None	None	None	None
<b>Network Ports</b>	Dual Gigabit	Dual Gigabit	Dual 10Gbps	Dual 10Gbps
<b>Video Output</b>	VGA (1), HDMI (1), DP (1)	VGA (1), HDMI (1), DP (1)	VGA (1), HDMI (1), DP (1)	VGA (1), HDMI (1), DP (1)
<b>Dimension</b>	427 x 251 x 45 mm 16.81 x 9.88 x 1.75 in 1U	427 x 251 x 45 mm 16.81 x 9.88 x 1.75 in 1U	427 x 251 x 45 mm 16.81 x 9.88 x 1.75 in 1U	427 x 251 x 45 mm 16.81 x 9.88 x 1.75 in 1U
<b>Weight*</b>	3.82 kg 8.43 lb	4.31 kg 9.50 lbs	4.31 kg 9.50 lbs	4.31 kg 9.50 lbs
<b>Maximum Power Consumption</b>	Internal 100-240 VAC, 110 W	Internal 100-240 VAC, 120 W	Internal 100-240 VAC, 220 W	Internal 100-240 VAC, 220 W
<b>Operating Temperature Range</b>	0-35° C 32-95° F	0-35° C 32-95° F	0-35° C 32-95° F	0-35° C 32-95° F
<b>Operating Humidity Range</b>	0-70%	0-70%	0-70%	0-70%
<b>Certifications</b>	FCC, UL, PSE, CE, CCC (S&E), BIS	FCC, UL, PSE, CE, CCC (S&E), BIS	FCC, UL, PSE, CE, CCC (S&E)	FCC, UL, PSE, CE, CCC (S&E)
<b>Rapid Replacement Part Numbers</b>	EN-RR000-1 (Monthly) EN-RR000-12 (Yearly)	EN-RR501-1 (Monthly) EN-RR501-12 (Yearly)	EN-RR701-1 (Monthly) EN-RR701-12 (Yearly)	EN-RR901-1 (Monthly) EN-RR901-12 (Yearly)

\*Typical - please utilize the Eagle Eye VMS Bridge Wizard for precise capacity




STORE AND VIEW LOCALLY LONGER

# Eagle Eye CMVRs

The Eagle Eye Cloud Managed Video Recorder (CMVR) addresses bandwidth challenges and redundant storage needs. Similar to a bridge in that it's a local device that connects cameras to the cloud, our CMVR has the added ability to store video locally. We offer a full range of CMVRs from compact to enterprise and everything in between.




## Compact CMVRs

These small form factor CMVRs are suitable for applications up to 25 cameras at 4 MP when a server rack is not available. They are suitable for wall or shelf mounting. This family of bridges are equipped with ruggedized, all aluminum enclosures designed to operate in a broad ambient temperature range. The CMVR 225/325 includes 4 POE ports for direct camera connection, while the 426+ and 524+ can also support AI processing for advanced Eagle Eye License Plate Recognition (LPR).

	CMVR 224+	CMVR 225	CMVR 324+
			
<b>Max Cameras*</b>	Up to 6 IP Cameras @4MP	Up to 6 IP Cameras @4MP	Up to 12 IP Cameras @4MP
<b>Max Analytic Count*</b>	5	5	5
<b>LPR Support*</b>	No	No	No
<b>Storage Capacity</b>	2 TB 60 days for 6 cameras @1MP	1 TB 30 days for 6 cameras @1MP	4 TB 60 days for 12 cameras @1MP
<b>POE Camera Ports</b>	None	4 port, Class 3	None
<b>Network Ports</b>	Dual Gigabit	1 Gigabit, 4X100 Megabit	Dual Gigabit
<b>Video Output</b>	HDMI (1), VGA (1)	HDMI (1), DP (1)	HDMI (1), VGA (1)
<b>Dimension</b>	180x 127 x 64 mm 7.08 x 5.00 x 2.50 in	127 x 172 x 75 mm 5.00 x 6.77 x 2.95 in	229 x 127 x 83 mm 9.00 x 5.00 x 3.25 in
<b>Weight</b>	1.20 kg 2.65 lbs	1.32 kg 2.91 lbs	2.39 kg 5.27 lbs
<b>Maximum Power Consumption</b>	External 100-240 VAC, 20 W	External 100-240 VAC, 22 W	External 100-240 VAC, 20 W
<b>Operating Temperature Range</b>	-10-50° C 14-122° F	-10-50° C 14-122° F	-10-50° C 14-122° F
<b>Operating Humidity Range</b>	0-70%	0-70%	0-70%
<b>Certifications</b>	FCC, UL, CE, UKCA, PSE, ACM, RoHS, CTick, WEEE, BIS	UL, CE, PSE, CB, TIS	FCC, UL, CE, UKCA, PSE, ACM, RoHS, CTick, WEEE, BIS
<b>Rapid Replacement Part Numbers</b>	EN-RR224p-1 (Monthly) EN-RR224p-12 (Yearly)	EN-RR225-1 (Monthly) EN-RR225-12 (Yearly)	EN-RR324p-1 (Monthly) EN-RR324p-12 (Yearly)






\*Typical - please utilize the Eagle Eye VMS Bridge Wizard for precise capacity

## Compact CMVRs

	CMVR 325	CMVR 426+	CMVR 524+
			
<b>Max Cameras*</b>	Up to 8 IP Cameras @4MP	Up to 20 IP Cameras @4MP	Up to 25 IP Cameras @4MP
<b>Max Analytic Count*</b>	5	15	20
<b>LPR Support*</b>	No	Up to 2 Cameras	Up to 4 LPR cameras
<b>Storage Capacity</b>	2 TB 45 days for 8 cameras @1MP	16TB 35 days for 20 cameras @ 4MP	16TB 30 days for 25 cameras @ 4MP
<b>POE Camera Ports</b>	4 port, Class 3	None	None
<b>Network Ports</b>	1 Gigabit, 4X100 Megabit	1 Gigabit, 4X100 Megabit	1 Gigabit, 4X100 Megabit
<b>Video Output</b>	HDMI (1), DP (1)	HDMI (1), DP (1)	HDMI (1), DP (1)
<b>Dimension</b>	127 x 172 x 75 mm 5.00 x 6.77 x 2.95 in	229 x 127 x 83 mm 9.00 x 5.00 x 3.25 in	229 x 127 x 83 mm 9.00 x 5.00 x 3.25 in
<b>Weight</b>	1.36 kg 3.0 lbs	2.39 kg 5.27 lbs	2.39 kg 5.27 lbs
<b>Maximum Power Consumption</b>	External 100-240 VAC, 22 W	External 100-240 VAC, 22 W	External 100-240 VAC, 22 W
<b>Operating Temperature Range</b>	-10-50° C 14-122° F	-10-50° C 14-122° F	-10-50° C 14-122° F
<b>Operating Humidity Range</b>	0-70%	0-70%	0-70%
<b>Certifications</b>	UL, CE, PSE, CB, TIS	FCC, UL, CE, UKCA, PSE, ACM, RoHS, CTick, WEEE	FCC, UL, CE, UKCA, PSE, ACM, RoHS, CTick, WEEE
<b>Rapid Replacement Part Numbers</b>	EN-RR325-1 (Monthly) EN-RR325-12 (Yearly)	EN-RR426p-1 (Monthly) EN-RR426p-12 (Yearly)	EN-RR524p-1 (Monthly) EN-RR524p-12 (Yearly)

## Rack CMVRs

These 1U rack-based CMVRs are designed to fit in standard equipment rack. The rack mount CMVRs are offered in a range of sizes to support larger camera counts. Versions are available with analog camera interfaces to allow direct connection of existing NTSC and PAL cameras. Versions are also available with integrated POE ports for direct connection of IP cameras.




	CMVR 320	CMVR 323	CMVR 330	CMVR 420	CMVR 430
					
<b>Max Cameras*</b>	Up to 20 IP Cameras @4MP	Up to 20 IP Cameras @4MP	8 Analog (NTSC/PAL) or up to 20 IP Cameras @4MP	Up to 35 IP Cameras @4MP	16 Analog (NTSC/PAL) or up to 35 IP Cameras @4MP
<b>Max Analytic Count*</b>	5	5	5	10	10
<b>LPR Support*</b>	No	No	No	Up to 2 Cameras	Up to 2 Cameras
<b>Storage Capacity</b>	4 TB 35 days for 20 cameras @1MP	4 TB 35 days for 20 cameras @1MP	4 TB 35 days for 20 cameras @1MP	16 TB 80 days for 35 cameras @1MP	16 TB 80 days for 35 cameras @1MP
<b>POE Camera Ports</b>	None	8 port, Class 3	None	None	None
<b>Network Ports</b>	Dual Gigabit	Dual Gigabit	Dual Gigabit	Dual Gigabit	Dual Gigabit
<b>Video Output</b>	VGA (1), DVI (1)	VGA (1), DVI (1)	VGA (1), HDMI (1), DP (1)	VGA (1), HDMI (1), DP (1)	VGA (1), HDMI (1), DP (1)
<b>Dimension</b>	427 x 251 x 45 mm 16.81 x 9.88 x 1.75 in 1U	427 x 251 x 45 mm 16.81 x 9.88 x 1.75 in 1U	427 x 251 x 45 mm 16.81 x 9.88 x 1.75 in 1U	427 x 251 x 45 mm 16.81 x 9.88 x 1.75 in 1U	427 x 251 x 45 mm 16.81 x 9.88 x 1.75 in 1U
<b>Weight</b>	3.76 kg 8.3 lbs	3.71 kg 8.17 lbs	4.45 kg 9.8 lbs	4.26 kg 9.4 lbs	4.40 kg 9.7 lbs
<b>Maximum Power Consumption</b>	Internal 100-240 VAC, 65 W	Internal 100-240 VAC, 65 W	Internal 100-240 VAC, 55 W	Internal 100-240 VAC, 50 W	Internal 100-240 VAC, 110 W
<b>Operating Temperature Range</b>	0-35° C 32-95° F	0-35° C 32-95° F	0-35° C 32-95° F	0-35° C 32-95° F	0-35° C 32-95° F
<b>Operating Humidity Range</b>	0-70%	0-70%	0-70%	0-70%	0-70%
<b>Certifications</b>	FCC, UL, PSE, CE, CCC (S&E), BIS	FCC, UL, PSE, CE, CCC (S&E), BIS	FCC, UL, PSE, CE, CCC (S&E), BIS	FCC, UL, PSE, CE, CCC (S&E), BIS	FCC, UL, PSE, CE, CCC (S&E), BIS
<b>Rapid Replacement Part Numbers</b>	EN-RR320-1 (Monthly) EN-RR320-12 (Yearly)	EN-RR323-1 (Monthly) EN-RR323-12 (Yearly)	EN-RR330-1 (Monthly) EN-RR330-12 (Yearly)	EN-RR420-1 (Monthly) EN-RR420-12 (Yearly)	EN-RR430-1 (Monthly) EN-RR430-12 (Yearly)

\*Typical - please utilize the Eagle Eye VMS Bridge Wizard for precise capacity



## High Capacity CMVRs



These High Capacity class CMVRs are designed with redundant power supplies and redundant storage systems to provide maximum reliability. Our systems utilize RAID (Redundant Array of Independent Disk) storage to ensure critical video content availability, so you can access your cameras when and where you need them. Our CMVRs can be combined and configured to support any number of cameras to ensure they are customized specifically for your needs.

	CMVR 520	CMVR 620	CMVR 820
			
<b>Max Cameras*</b>	Up to 50 IP Cameras @4MP	Up to 100 IP Cameras @4MP	Up to 165 IP Cameras @4MP
<b>Max Analytic Count*</b>	20	30	40
<b>LPR Support*</b>	Up to 4 Cameras	No	No
<b>Storage Capacity</b>	64TB (raw), 48TB (useable) RAID 5 40 days for 50 cameras @4MP	64TB (raw), 48TB (useable) RAID 5 30 days for 60 cameras @4MP	192 TB (raw), 160TB (useable) RAID 6 40 days for 165 cameras @4MP
<b>POE Camera Ports</b>	None	None	None
<b>Network Ports</b>	Dual 2.5 Gigabit	Dual 2.5 Gigabit	Dual Gigabit
<b>Video Output</b>	HDMI (1), VGA (1), DP (1)	HDMI (1), VGA (1), DP (1)	HDMI (1), VGA (1), DP (1)
<b>Dimension</b>	437 x 503 x 43 mm 17.20 x 19.85 x 1.70 in 1U	437 x 503 x 43 mm 17.20 x 19.85 x 1.70 in 1U	437 x 647 x 89 mm 17.20 x 25.50 x 3.50 in 2U
<b>Weight</b>	12.25 kg 27.00 lbs	12.25 kg 27.00 lbs	23.5 kg 51.9 lbs
<b>Maximum Power Consumption</b>	Internal 100-240 VAC, 160 W	Internal 100-240 VAC, 210 W	Dual Internal 100-240 VAC, 280 W
<b>Operating Temperature Range</b>	0-35° C 32-95° F	0-35° C 32-95° F	0-35° C 32-95° F
<b>Operating Humidity Range</b>	0-70%	0-70%	0-70%
<b>Certifications</b>	FCC, UL, PSE, CE, CCC (S&E)	FCC, UL, PSE, CE, CCC (S&E)	FCC, UL, PSE, CE, CCC (S&E)
<b>Rapid Replacement Part Numbers</b>	EN-RR520-1 (Monthly) EN-RR520-12 (Yearly)	EN-RR620-1 (Monthly) EN-RR620-12 (Yearly)	EN-RR820-1 (Monthly) EN-RR820-12 (Yearly)

\*Typical - please utilize the Eagle Eye VMS Bridge Wizard for precise capacity

## Enterprise CMVRs

These powerful enterprise class CMVRs are built with redundant power supplies and error-correcting memory to provide maximum reliability. RAID storage ensures critical video content availability. IT professionals can securely and remotely monitor and manage the CMVR health using IPMI (Intelligent Platform Management Interface). These CMVRs can be combined and configured to support any number of cameras.

	CMVR 620e	CMVR 820e
		
<b>Max Cameras*</b>	Up to 100 IP Cameras @4MP	Up to 165 IP Cameras @4MP
<b>Max Analytic Count*</b>	30	40
<b>LPR Support*</b>	Up to 8 Cameras	Up to 8 Cameras
<b>Storage Capacity</b>	64TB (raw), 48TB (useable) RAID 5 30 days for 60 cameras @4MP	192 TB (raw), 160TB (useable) RAID 6 40 days for 165 cameras @4MP
<b>Memory Type</b>	ECC	ECC
<b>Remote Management</b>	IPMI	IPMI
<b>POE Camera Ports</b>	None	None
<b>Network Ports</b>	Dual Gigabit	Dual Gigabit
<b>Video Output</b>	HDMI (1), VGA (1), DP (1)	HDMI (1), VGA (1), DP (1)
<b>Dimension</b>	437 x 503 x 43 mm 17.20 x 19.85 x 1.70 in 1U	437 x 647 x 89 mm 17.20 x 25.50 x 3.50 in 2U
<b>Weight</b>	12.25 kg 27.00 lbs	23.5 kg 51.9 lbs
<b>Maximum Power Consumption</b>	Dual Internal 100-240 VAC, 210 W	Dual Internal 100-240 VAC, 280 W
<b>Operating Temperature Range</b>	0-35° C 32-95° F	0-35° C 32-95° F
<b>Operating Humidity Range</b>	0-70%	0-70%
<b>Certifications</b>	FCC, UL, PSE, CE, CCC (S&E)	FCC, UL, PSE, CE, CCC (S&E)
<b>Rapid Replacement Part Numbers</b>	EN-RR620e-1 (Monthly) EN-RR620e-12 (Yearly)	EN-RR820e-1 (Monthly) EN-RR820e-12 (Yearly)

\*Typical - please utilize the Eagle Eye VMS Bridge Wizard for precise capacity

SWITCH TO THE BEST




# Eagle Eye Switches

Our PoE (power over ethernet) switches serve as regular network switches, plus they provide power to the system's cameras. Eagle Eye's managed PoE switches allow authorized users to power cycle individual cameras on a port-by-port basis from within the Eagle Eye Cloud VMS user interface. These PoE switches give you faster installations, easier maintenance, reduced service calls, and better visibility into your camera operations.

	SWITCH SW05m	SWITCH SW26m
		
<b>Total Number of Ports</b>	5	26
<b>POE Ports</b>	4	24
<b>Uplink Ports</b>	1	2 (+2 Gig Combo Uplink)
<b>Power Supply</b>	External Power Supply	Built-In Power Supply
<b>Voltage Range</b>	AC100-240V	AC100-240V
<b>POE Specifications</b>	802.3af & 802.3at	802.3af & 802.3at
<b>Maximum Power Budget</b>	60W	370W
<b>Speed</b>	10/100Mbps	10/100Mbps
<b>Dimension</b>	119 x 85 x 28 mm 4.70 x 3.30 x 1.10 in	440 x 200 x 44 mm 17.30 x 7.90 x 1.70 in
<b>Switching Capacity</b>	1G	8.8G
<b>MAC Address</b>	2K MAC address table	4K MAC address table
<b>Temperature Range</b>	-10-55° C 14-131° F	0-40° C 32-104° F
<b>Storage Temperature</b>	-40-70° C -40-158° F	-40-70° C -40-158° F
<b>Rack Mountable</b>	No	Yes (Mount Ears Included)
<b>Rapid Replacement Part Numbers</b>	EN-RRSW05m-1 (Monthly) EN-RRSW05m-12 (Yearly)	EN-RRSW26m-1 (Monthly) EN-RRSW26m-12 (Yearly)

## Gigabit PoE Switches

Eagle Eye Managed PoE switches are industry standard highly reliable PoE switches designed to seamlessly integrate with the Eagle Eye Security Camera VMS. Gigabit switches are great for display stations that require higher bandwidth, if network topology requires cascading multiple switches, for locations where multiple bridges deployed, or for flexible mounting options.

	EN-SW10g-001	EN-SW20g-001	EN-SW28g-001
			
<b>Total Number of Ports</b>	10	20	28
<b>POE Ports</b>	8 PoE+	16 PoE+	24 PoE+
<b>Uplink Ports</b>	2 SFP	2 RJ-45 and 2 SFP	2 RJ-45 and 2 SFP
<b>Power Supply</b>	Built-In Power Supply	Built-In Power Supply	Built-In Power Supply
<b>Voltage Range</b>	AC100-240V	AC100-240V	AC100-240V
<b>POE Specifications</b>	54 VDC 802.3af (max 15.4W) 802.3at (max 30W)	54 VDC 802.3af (max 15.4W) 802.3at (max 30W)	54 VDC 802.3af (max 15.4W) 802.3at (max 30W)
<b>Maximum Power Budget</b>	125W	250W	370W
<b>Speed</b>	10/100/1000 Mbps	10/100/1000 Mbps	10/100/1000 Mbps
<b>Dimension</b>	270 x 180 x 44 mm 10.6 x 7.1 x 1.7 in	440 x 200 x 44 mm 17.3 x 7.9 x 1.7 in	440 x 200 x 44 mm 17.3 x 7.9 x 1.7 in
<b>Switching Capacity</b>	20 Gbps	40 Gbps	56 Gbps
<b>MAC Address</b>	8K MAC address table	8K MAC address table	8K MAC address table
<b>Temperature Range</b>	0 - 50° C 32 - 122° F	0 - 50° C 32 - 122° F	0 - 50° C 32 - 122° F
<b>Storage Temperature</b>	-20 - 70° C -4 - 158° F	-20 - 70° C -4 - 158° F	-20 - 70° C -4 - 158° F
<b>Rack Mountable</b>	Rack or wall mounting (Brackets Included)	Rack or wall mounting (Brackets Included)	Rack or wall mounting (Brackets Included)
<b>Rapid Replacement Part Numbers</b>	EN-RRSW10g-1 (Monthly) EN-RRSW10g-12 (Yearly)	EN-RRSW20g-1 (Monthly) EN-RRSW20g-12 (Yearly)	EN-RRSW28g-1 (Monthly) EN-RRSW28g-12 (Yearly)

PUT CAMERAS WHERE THEY SEEMED IMPOSSIBLE


# Eagle Eye Cabinet Systems

Eagle Eye's range of cabinets is defined by agility and ruggedness. Each system is compact enough to offer flexible placement, including pole mounting, and weatherproofed for locations where rain, wind, and sun may be constant factors. They're perfect for peripheral areas far from your wired network or site power, such as parking lots, industrial applications, and anywhere you wouldn't consider a conventional camera.

Three different Cabinet System types cover a wide range of needs. Select from Eagle Eye Anywhere Cabinets, Direct Cabinets, and Bridge Cabinets based on the availability of power and on your need for on-premises analytics, including license plate recognition.

## Eagle Eye Anywhere Cabinets

Eagle Eye Anywhere Cabinets require no bridge or CMVR, and include an available solar panel, battery, and cellular modem for true stand-alone operation in the most demanding settings.\*

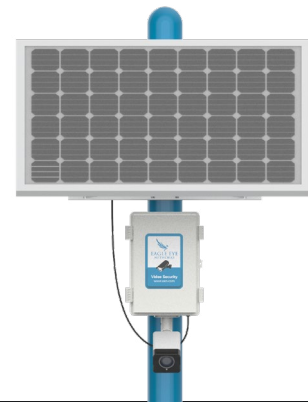

	SS212wcs-1DB13	SS212wcs-1DX01
<b>Camera Model</b>	1 x DB13	1 x DX01
<b>Connectivity</b>	Wifi or 4G LTE (T-Mobile)	Wifi or 4G LTE (T-Mobile)
<b>Data Plan</b>	Unlimited data plan offered by Eagle Eye Networks	Unlimited data plan offered by Eagle Eye Networks
<b>Battery Capacity</b>	30 Ah (360 Wh)	30 Ah (360 Wh)
<b>Typical Power Consumption</b>	5W (supports up to 3 days without solar charging)	5W (supports up to 3 days without solar charging)
<b>SD Card Storage</b>	64GB	64GB
<b>LED Deterrence Light</b>	Included	Included
<b>Cabinet Dimensions</b>	11.8 x 7.9 x 6.7 in 300x200x170 mm	11.8 x 7.9 x 6.7 in 300x200x170 mm
<b>Solar Power Dimensions</b>	41.8 x 20.9 x 1.4 in 1062 x 530 x 35 mm	41.8 x 20.9 x 1.4 in 1062 x 530 x 35 mm
<b>Cabinet Weight</b>	13.8 lbs (6.26 kg)	13.9 lbs (6.3 kg)
<b>Solar Panel Weight</b>	14.1 lbs (6.4 kg)	14.1 lbs (6.4 kg)
<b>Solar Panel Power</b>	100W	100W
<b>Ingress Protection</b>	IP 65	IP 65
<b>Mounting Accessories</b>	Includes cabinet and solar panel mounting brackets with flexible steel pole clamps (990 mm)	

\*Only available in the United States.

## Eagle Eye Direct Cabinets

Eagle Eye Direct Cabinets require only an available source of wired power, but with included cellular connection operate outside your wired network — no trenching or network expansion required.\*



	SS210wcs-1DB13	SS210wcs-1DX01
<b>Camera Model</b>	1 x DB13	1 x DX01
<b>Connectivity</b>	Wifi or 4G LTE (TMobile)	Wifi or 4G LTE (TMobile)
<b>Data Plan</b>	Unlimited data plan offered by Eagle Eye Networks	Unlimited data plan offered by Eagle Eye Networks
<b>SD Card Storage</b>	64GB	64GB
<b>LED Deterrence Light</b>	Included	Included
<b>Cabinet Dimensions</b>	11.8 x 7.9 x 6.7 in 300x200x170mm	11.8 x 7.9 x 6.7 in 300x200x170mm
<b>Cabinet Weight</b>	13.8 lbs (6.26 kg)	13.9 lbs (6.3 kg)
<b>Ingress Protection</b>	IP 65	IP 65
<b>Mounting Accessories</b>	Includes cabinet and solar panel mounting brackets with flexible steel pole clamps (990 mm)	

\*Only available in the United States.



## Eagle Eye Bridge Cabinets

Eagle Eye Bridge Cabinets require only a source of wired power, and allow you to install up to seven outdoor cameras, with AI, analytics, and license plate recognition (LPR) performed thanks to an included Eagle Eye CMVR.\*



	SS100wc
<b>Connectivity</b>	Wifi or 4G LTE (TMobile)
<b>Data Plan</b>	Unlimited data plan offered by Eagle Eye Networks
<b>Cabinet Dimensions</b>	24 x 16 x 8.25 in 610 x 407 x 210 mm
<b>Cabinet Weight</b>	34.1 lbs (15.5 kg)
<b>Ingress Protection</b>	IP 65
<b>Mounting Accessories</b>	Includes cabinet and solar panel mounting brackets with flexible steel pole clamps (990 mm)

\*Only available in the United States.



**LEARN MORE**  
Visit our website  
[EEN.COM](http://EEN.COM)

**UNITED STATES**  
+1-512-473-0500  
[sales@een.com](mailto:sales@een.com)

**LATIN AMERICA/CARIBBEAN**  
+52 55 8526 4926  
[LATAMsales@een.com](mailto:LATAMsales@een.com)

**EUROPE**  
+31 20 26 10 460  
[EMEAsales@een.com](mailto:EMEAsales@een.com)

**ASIA-PACIFIC**  
+81-3-6868-5527  
[APACsales@een.com](mailto:APACsales@een.com)